

SPECIFICATION SHEET

CEILING FAN ORIONEX

Item Number **72992**
52 Inch



Outdoor
Damp Locations



Speeds



Espresso




ABS Blades



Type	Ceiling
Fan Finish	Espresso
Motor Material	Silicon Steel
Blades	5 / ABS / Espresso
Blade Pitch	12°
Approved Location	Outdoor Damp Locations
Suggested Space Size	Up to 20' x 20'
Down Rod Measurements	3/4" x 6"
Installation	Downrod
Light Bulb Use	2 Bulbs 60W / E26 Standard Base (Not included)
Light kit glass	Opal Frosted Glass
Control	Adaptable
Speed	3
Reverse Flow	Yes
Capacitor	4uF/300V+5uF/250V+6uF/250V

Power	60W / 120V ~ 60Hz
Airflow (CFM)	4,975
Airflow Efficiency (CFM/W)	168.9
RPM	167
Amp	0.48
Master Box	1
Barcode	7453089417802

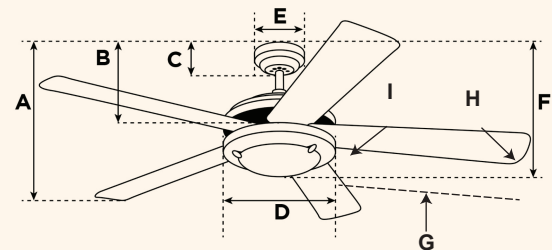

Measurements

A. Top of Canopy to Bottom of Blades	12.5 "
B. Top of Canopy to Bottom of Switch House	15 "
C. Top of Canopy to Bottom of Canopy	2.2 "
D. Width of Motor Housing	11.3 "
E. Width of Canopy	5.2 "
F. Top of Canopy to Bottom of Glass	16.8 "
G. Length of Blades	23.1 "
H. Width at the beginning of the blade	4.2 "
I. Width at the end of the blade	5.4 "



 and WESTINGHOUSE are registered trademarks of Westinghouse Electric Corporation. Used under license by Westinghouse Lighting. All Rights Reserved.
A licensee of Westinghouse Electric Corporation.
Specifications are subject to change without notice. Please visit www.westinghouselightinglatinamerica.com for latest information.

2023

HOJA DE ESPECIFICACIONES

VENTILADOR DE TECHO ORIONEX

Número de Artículo **72992**
132 cm



Exterior
Áreas Húmedas



Velocidades



Espresso



Aspas ABS



GARANTÍA
25 AÑOS
GARANTÍA
MOTOR




Intertek

Tipo Techo
Acabado del ventilador Espresso
Material del Motor Acero al Silicio
Aspas 5 / ABS / Espresso
Grado de aspas 12°
Lugar aprobado Exterior Áreas Húmedas

Tamaño sugerido del espacio Hasta 20' x 20'
Medida de Varilla Vertical 3/4" x 6"
Instalación Varilla vertical
Juego de iluminación 2 Bombillos 60 W Máx. Base
Estándar E26 (No incluidos)
Kit de pantalla de lámpara Vidrio esmerilado opalino
Control Control Adaptable
Velocidad 3
Flujo inverso Si
Capacitor 4uF/300V+5uF/
250V+6uF/250V

Potencia 60W / 120V ~ 60Hz
Flujo de aire (CFM) 4,975
Eficiencia de Flujo de Aire (CFM/W) 168.9
RPM 167
Amperio 0,48
Caja Maestra 1
Código de Barra 7453089417802

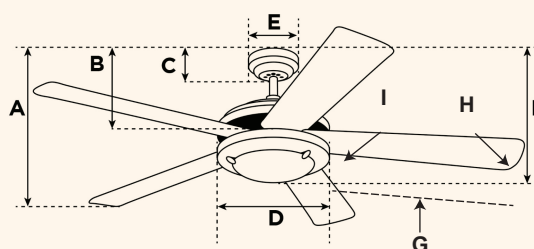

A. De la parte superior del dosel a la parte inferior de las aspas 31.6 cm
B. De la parte superior del dosel a la parte inferior al interruptor 38.1 cm
C. De la parte superior del dosel a la parte inferior del dosel 56 cm
D. Ancho de la carcacha del motor 28.6 cm
E. Ancho del dosel 13.1 cm
F. Parte superior del dosel a la parte inferior al vidrio 42.7 cm
G. Longitud de las Aspas 58.7 cm
H. Ancho al comienzo de las Aspas 10.6 cm
I. Ancho al final de las Aspas 13.8 cm



WESTINGHOUSE son una marca registrada por Westinghouse Electric Corporation. Usado bajo licencia Westinghouse Lighting. Todos los derechos reservados.
Una licencia de Westinghouse Electric Corporation.
Las especificaciones están sujetas a cambios sin previo aviso. Por favor visite www.westinghouselightinglatinamerica.com para la información más reciente.

2023